


# DK10

## Flap Flowmeter and Switch

- for liquids
- robust design, can be installed in any position, insensitive to dirty/contaminated liquids
- suitable for pipes from 1/4" to 8"
- many different material combinations for practically all types of process liquids
- max. pressure: 200 bar, max. temperature: 330 °C
- for viscosities up to 600 cSt
- mechanical flow indication
- output signals: 4...20 mA, 1 or 2 Microswitches
-  Ex- version acc. to ATEX optional



### Description:

The DK10 series flap flow meter comprises a spring-loaded flap mounted in a hemispherical chamber. The flap is deflected by the flow in the line. The deflection is directly proportional to the flow rate. The movement of the flap is transmitted via a shaft – that is sealed off from the process – to a mechanical pointer and the flow is displayed on a scale. One or two microswitches for flow monitoring or an analogue output module can be installed in the display enclosure (optional). Each flow meter is calibrated for the liquid being monitored based on customer specifications. The devices are available with G or NPT threads for 1/4" to 2" pipes and as a wafer for mounting between two DIN or ANSI flanges on DN 80 (3") to DN 200 (8") pipe sizes.

### Typical applications:

Due to their robust design, their resistance to dirty or contaminated liquids and the variety of material combinations available, the DK10 flap flow meters are suitable for use as control and monitoring devices for practically all process liquids.

## Models:

**DK10...** Flap flow meter with a directly coupled mechanical pointer

## Materials:

Flaps and shafts are made of stainless steel as standard. Shafts made of titanium or Hastelloy, as well as plastic flaps, are available for aggressive / caustic liquids and for plastic models.

A	Aluminium (low-cost for oils), Tmax = 200 °C
B	Bronze (z. B. for sea water), Tmax = 250 °C
C	Cast iron (for general purpose applications), Tmax = 200 °C
CN	Cast iron, nickel plated (corrosion proof), Tmax = 200 °C
S	Cast steel, Tmax = 250 °C
V	St. st. 1.4408, ASME 316, ASTM - A - 351 CR8M, Tmax = 330 °C
PT	PTFE, Pmax = 7 bar, Tmax = 150 °C
PV	PVC, Pmax = 7 bar, Tmax = 60 °C

## Gaskets:

The choice of sealing material depends on the liquid being monitored and the expected temperatures.

B	NBR (-40...+110 °C)
E	EPDM (-40...+150 °C)
V	FKM (-20...+200 °C)
PT	PTFE (-100...+250 °C)
PF	Perlast (Perfluorelastomer, -15...+330 °C)

## Measuring ranges:

The quoted full scale value ranges serve as a rough guide for water. Within the specified limitations all measuring ranges can be realised.

E.g. unit S: 4-70 l/min;  
smallest possible range 0...4 l/min,  
largest possible range 0...70 l/min

Process-connection (G or NPT)	Con-nection code	Measurement range end values (full scale)			
		...LM [l/min]	...MH [m³/h]	...GM [U.S.gpm]	...GH [U.S.gph]
<b>Unit size S</b>					
1/4"/DN 10	<b>1</b>	4 - 70	0,24 - 4,2	1,0 - 18,5	60 - 1100
1/2"/DN 15	<b>2</b>	4 - 70	0,24 - 4,2	1,0 - 18,5	60 - 1100
3/4"/DN 20	<b>3</b>	4 - 70	0,24 - 4,2	1,0 - 18,5	60 - 1100
1"/DN 25	<b>4</b>	4 - 70	0,24 - 4,2	1,0 - 18,5	60 - 1100
<b>Unit size M</b>					
3/4"/DN 20	<b>5</b>	40 - 400	2,4 - 24	10 - 106	600 - 6300
1"/DN 25	<b>6</b>	40 - 400	2,4 - 24	10 - 106	600 - 6300
1 1/4"/DN 32	<b>7</b>	40 - 400	2,4 - 24	10 - 106	600 - 6300
1 1/2"/DN 40	<b>8</b>	40 - 500	2,4 - 30	10 - 132	600 - 8000
2"/DN 50	<b>9</b>	40 - 500	2,4 - 30	10 - 132	600 - 8000
2 1/2"/DN 65	<b>9A</b>	40 - 800	2,4 - 48	10 - 211	600 - 12.800
<b>Unit size L</b>					
3"/DN 80	<b>10</b>	120 - 1500	7,2 - 90	32 - 400	1900-23700
4"/DN 100	<b>11</b>	120 - 2000	7,2 - 120	32 - 530	1900-31700
6"/DN 150	<b>12</b>	120 - 3500	7,2 - 210	32 - 925	1900-55500
8"/DN 200	<b>13</b>	120 - 5000	7,2 - 300	32 - 1325	1900-79200

## Order Code:

**Order number:** **DK10.** **B.** **B.** **G1.** **LM35.** **LP.** **1.** **M.** **R.**

**Flap flowmeter and switch**

### Housing material:

A = aluminium  
B = bronze  
C = cast iron  
CN = cast iron, nickel plated  
S = cast steel  
V = stainless steel  
PT = PTFE  
PV = PVC

### Sealing material:

B = NBR  
E = EPDM  
V = FKM  
PT = PTFE  
PF = Perlast

### Process connections and connection code:

G1...G9A = G 1/4 - G 2 female, measuring ranges 1-9A  
N1...N9A = 1/4" NPT - 2 1/2" NPT female, measuring ranges 1-9A

FD1...FD13 = DIN flange and range 1...13 /xx = pressure rating PN 10, 16, 25, 40  
FA1...FA13 = ANSI flange and range 1...13 /xxx = pressure rating 150, 300, 600 lbs

D10...D13 = wafer for DIN flanges, measuring ranges 10-13 (only for pressure rating LP)  
A10...A13 = wafer for ANSI flanges, measuring ranges 10-13 (only for pressure rating LP)

### Unit and full scale range:

(full scale value free choosable from table.  
Example: LM35 at number of measuring range 3)  
LM... = [l/min]  
MH... = [m³/h]  
GM... = [U.S. gpm]  
GH... = [U.S. gph]

### Pressure rating of housing:

VP = max 7 bar / 100 psi for plastic housing  
LP = max. 20 bar / 300 psi  
MP = max. 50 bar / 750 psi  
HP = max. 200 bar / 3000 psi for cast and stainless steel  
max. 100 bar / 1450 psi for cast iron

### Viscosity of process media:

1...600 = please specify viscosity of liquid at operating temperature in cSt (mm²/s)

### Output signals:

M = none, mechanical flow indication only  
S1 = 1 microswitch, 3-pin changeover contact  
S2 = 2 microswitches, 3-pin changeover contacts  
SG1= 1 microswitch, gold-plated contacts, 3-pin changeover  
SG2= 2 microswitches, gold-plated contacts, 3-pin changeover  
**(microswitches also available in ATEX version)**  
A2 = analogue output 4...20 mA, 2-wire, 8...28 VDC  
A3 = analogue output 4...20 mA, 3-wire, 8...28 VDC

### Direction of flow:

L = from left to right  
R = from right to left  
U = from bottom to top  
O = from top to bottom

## Technical Data (mechanical):

**Max. pressure:** 20 / 50 / 200 bar  
300 / 750 / 3000 psi  
plastic housing max. 7 bar / 100 psi

**Medium-temperature:** -100...+330 °C (depending on device materials and gasket material)

**Accuracy:** ± 3 % of full scale

**Max. flow:** min. 2 x full scale

**Mounting position:** any

## Pressure rating:

**VP** max. 7 bar / 100 psi  
**LP** max. 20 bar / 300 psi  
**MP** max. 50 bar / 750 psi  
**HP** max. 200 bar / 3000 psi (for cast iron, cast steel or st. steel housing only)

## Limit contacts:

One or two electromechanical limit switches - that can be adjusted over the entire measurement range - can be fitted to DK10 flow meters.

### Models

**S1/S2:** 1 or 2 microswitches as 3-pin changeover contact

### Switching capacity:

15 A, 250 V  
0,5 A, 125 VDC /  
0,25 A, 250 VDC


### Models

**SG1/SG2:** as for S1/S2, but with gold-plated contacts

### Factory set switch point:

available on request

## Electrical connection:

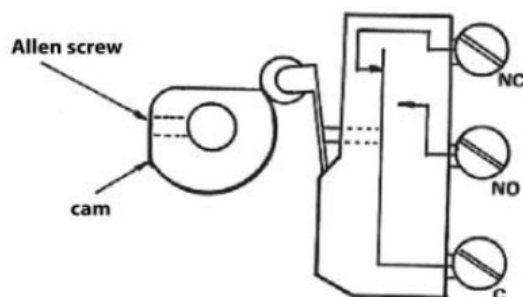

## Analogue output:

The optional analogue output on the DK10 meter is available as a 2- or 3-wire circuit. It provides a 4...20 mA signal that corresponds with the calibrated measurement range.

### Models:

**A2:** 2-wire-version  
**A3:** 3-wire-version

**Output range:** 4...20 mA = 0...full scale (± 5%)

**Linearity:** ± 1 %

**Repeatability:** < 0,2 %

**Supply:** 8...28 VDC, 50 mA max.

**Over-voltage protection:** up to 30 V

**Max. load-impedance:**


**A2:**  $R < (U-8 \text{ V})/0,02 \text{ mA}$

**A3:**  $R < (U-3 \text{ V})/0,02 \text{ mA}$


**Operating temperature:** -40...+85 °C

## Connection assignment:

### A2 - 2-wire

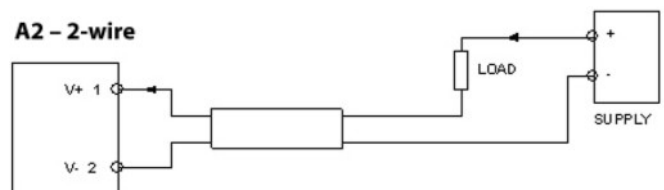


### A3 - 3-wire

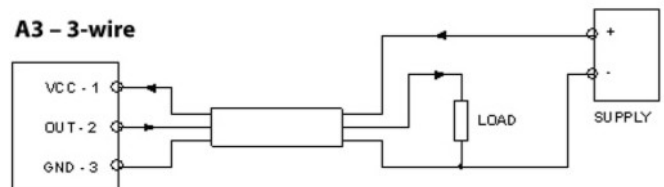


**Dimensions:**

**Unit S:**

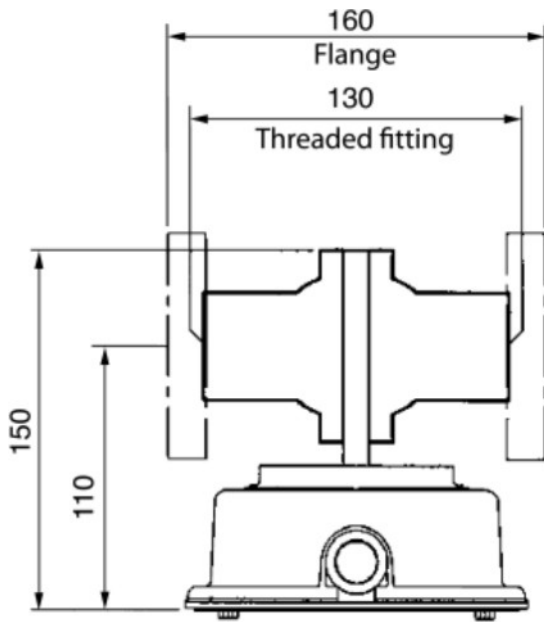


**Unit M / L:**

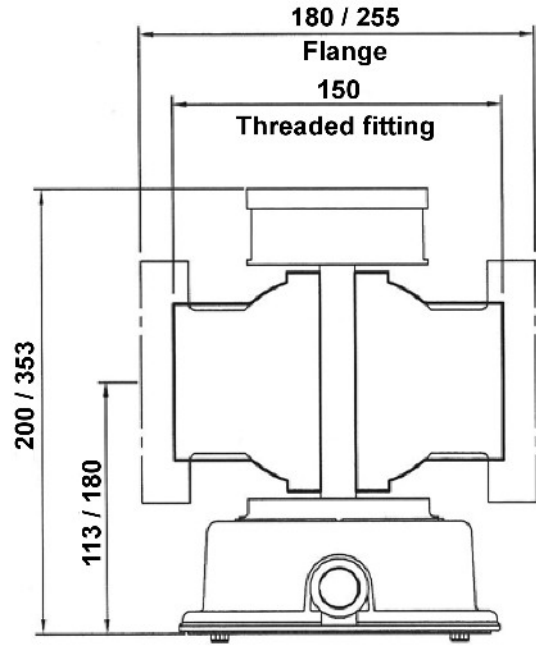

Flow

**Unit L (wafer):**

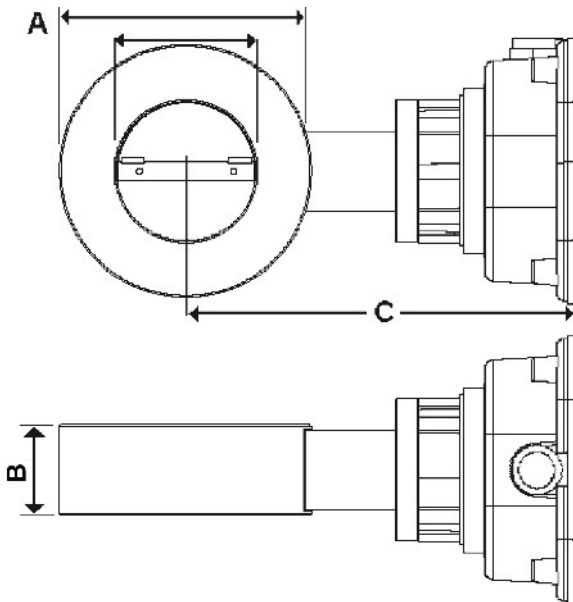

**Size table wafer:**

DN	A [mm]	B [mm]	C [mm]	ANSI	A [mm]	B [mm]	C [mm]
80	138	50	216	3"	127	50	210
100	158	50	226	4"	157	50	217
150	218	70	264	6"	216	70	263
200	278	70	291	8"	270	70	287